

NEW

LAUDA Variocool

Circulation chillers for variable use in laboratory, mini-plant and production for temperatures from -20 up to 40 °C



Application examples

- Central cooling water supply in laboratories
- Cooling of analytical devices
- Temperature control of bio-reactors
- Supply to cooling traps

Numerous options, compact design, easy operation

The **LAUDA Variocool** circulation chillers offer a broad performance spectrum for demanding temperature control tasks. The color TFT screen makes operation easy. A USB interface and an alarm contact are integrated as standard features. Additional interfaces are available as accessories. They are located in the front of the device, which means they are easy to access.

The circulation chillers with their multitude of options are very well suited to a number of different areas of application. Optional pumps, for example, enable higher supply pressure. Optional heating units, which are adapted to the cooling capacity, enable the quick heating of the connected application when needed.

Your advantages at a glance



The Variocool advantages

Your benefits



- 13 models in air or water-cooled design with cooling capacities from 600 W up to 10 kW
- All models with electronic expansion valve
- Due to their compact design, units up to 2 kW of cooling capacity can be placed under the laboratory table

- The appropriate solution to every requirement
- Good temperature control and cost savings thanks to reduced energy consumption
- Saves valuable lab space



- Display and operation via color TFT screen and membrane keyboard
- Electronic fill gauge on the display and low level alarm when fluid level too low

- Easy and clear setup options
- Early detection of insufficient fluid



- Options:
 - high power pumps
 - heaters
 - flow control
 - outdoor installation
 - use with DI water
 - noise reduction

- Flexible customization to applications



- USB interface and alarm contact standard features in the front of the device
- Retrofittable interfaces as accessory:
 - analog module
 - RS-232/485 interface
 - contact modules
 - profibus module
 - Pt100/LiBus module

- Easy accessibility
- Flexible control options



- Front grid can be easily removed without tool
- Tower design for larger models (from VC 7000)
- Microchannel condensers in all air-cooled models
- All models (except VC 600) with adjustable bypass and pressure gauge

- Easy to clean condenser
- Space-saving setup
- Reduced footprint and lower refrigerant quantity
- Connection of pressure sensitive applications

LAUDA Variocool

Variocool Circulation chillers with cooling capacities up to 2 kW


Variocool circulation chillers function in an operating temperature range of -20 to 40 °C. Optional heaters can be added to increase the maximum temperature to 80 °C. For greater pressure requirements, optional pumps are available with the VC 1200 version or higher. With the exception of the VC 600, all models are also available as water-cooled versions. All devices are equipped with lockable casters. The compact dimensions of the models from VC 600 to VC 2000 (W) allows to place them under the laboratory table.



Circulation chiller VC 600

All types

Pump characteristic Heat transfer liquid: Water

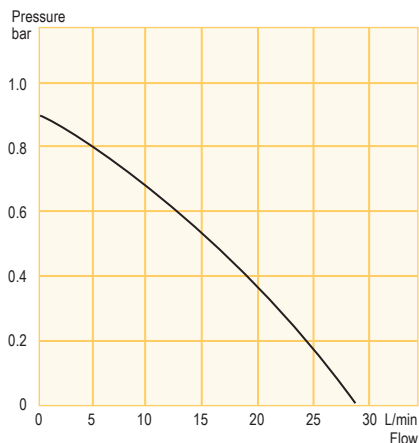

Temperature range

-20...40 °C (-20...80 °C with optional heater)

Included as standard

USB interface · alarm contact

Included accessories

nipples · screw caps

Options

High-power pumps* · heater · flow control · outdoor installation · DI water compatibility



All technical data on
page 108 and following

Other power supply variants on page 116



595 mm



650 mm



650 mm



650 mm



650 mm

Technical features		VC 600	VC 1200	VC 1200 W	VC 2000	VC 2000 W
Working temperature range	°C	-20...40	-20...40	-20...40	-20...40	-20...40
Working temperature range with optional heater	°C	-20...80	-20...80	-20...80	-20...80	-20...80
Temperature stability	±K	0.2	0.2	0.2	0.2	0.2
Cooling output at 20 °C	kW	0.6	1.2	1.2	2.0	2.0
Pump pressure max.	bar	0.9	0.9	0.9	0.9	0.9
Pump flow	L/min	28	28	28	28	28
Cat. No. 208-220 V; 60 Hz		LWG 275**	LWG 876	LWG 882	LWG 877	LWG 883
Cat. No. 115 V; 60 Hz		LWG 475	—	—	—	—

* Using such a pump can change the available cooling capacity, and causes a change of the height of the housing from 650 mm to 790 mm for VC 1200 (W) and VC 2000 (W) ** 220 V; 60 Hz

Variocool

Circulation chillers with cooling capacities up to 5 kW


The models VC 3000 and VC 5000 offer cooling capacities of 3 and 5 kW. They are also available in water-cooled design (W). For flexible adaptation to different applications the chillers can also be delivered with optional high-power pumps or heaters. Further options are a flow control, outdoor installation or a noise reduction for the types VC 5000 and VC 5000 W.



Circulation chiller VC 3000 W

All types

Pump characteristic Heat transfer liquid: Water

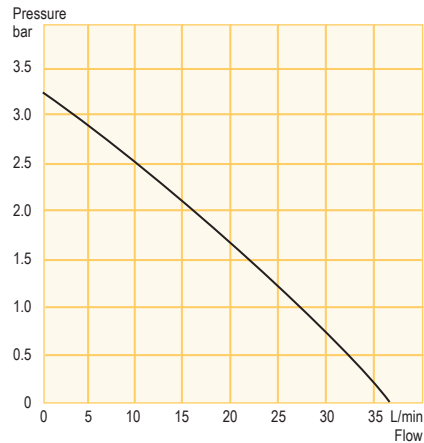

Temperature range

-20...40 °C (-20...80 °C with optional heater)

Included as standard

USB interface · alarm contact

Included accessories

nipples · screw caps

Options

High-power pumps* · heater · flow control · outdoor installation · noise reduction (VC 5000, VC 5000 W)



All technical data on page 108 and following

Other power supply variants on page 116



970 mm



970 mm



970 mm



970 mm

Technical features		VC 3000	VC 3000 W	VC 5000	VC 5000 W
Working temperature range	°C	-20...40	-20...40	-20...40	-20...40
Working temperature range with optional heater	°C	-20...80	-20...80	-20...80	-20...80
Temperature stability	±K	0.2	0.2	0.2	0.2
Cooling output at 20 °C	kW	3.0	3.0	5.0	5.0
Pump pressure max.	bar	3.2	3.2	3.2	3.2
Pump flow	L/min	37	37	37	37
Cat. No.	208-220 V; 60 Hz	LWG 878	LWG 884	LWG 379**	LWG 385**

* Using such a pump can change the available cooling capacity ** 208-220 V; 3/PE; 60 Hz

LAUDA Variocool

Variocool Circulation chillers with cooling capacities up to 10 kW


The highly efficient tower design circulation chillers provide cooling capacities between 7 and 10 kW. Options like heating or high-power pumps add to the devices' areas of application. The models are available in air or water-cooled design. All models are equipped with casters which can be controlled and locked.



Circulation chiller VC 7000

All types

Pump characteristic Heat transfer liquid: Water

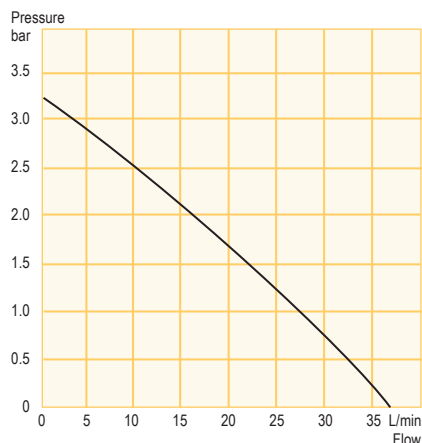

Temperature range

-20...40 °C (-20...80 °C with optional heater)

Included as standard

USB interface · alarm contact

Included accessories

nipples · screw caps

Options

High-power pumps* · heater · flow control · outdoor installation · noise reduction



All technical data on
page 108 and following

Other power supply variants on page 116



1250 mm



1250 mm



1250 mm



1250 mm


Technical features		VC 7000	VC 7000 W	VC 10000	VC 10000 W
Working temperature range	°C	-20...40	-20...40	-20...40	-20...40
Working temperature range with optional heater	°C	-20...80	-20...80	-20...80	-20...80
Temperature stability	±K	0.5	0.5	0.5	0.5
Cooling output at 20 °C	kW	7.0	7.0	10.0	10.0
Pump pressure max.	bar	3.2	3.2	3.2	3.2
Pump flow	L/min	37	37	37	37
Cat. No.		208-220 V; 3/PE; 60 Hz	LWG 380	LWG 386	LWG 381
					LWG 387

* Using such a pump can change the available cooling capacity

Options Variocool

For all Variocool models, different options can be ordered. The options can only be fitted ex-works. Please check the table below for compatibility of options with the regarding circulation chiller type.

Pump characteristics optional pumps Heat transfer liquid: water

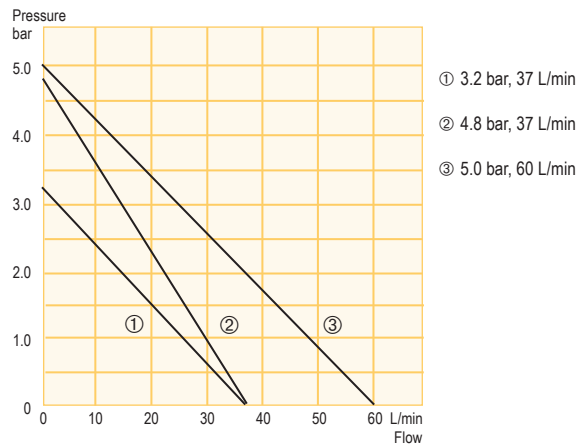

Options

Heaters	For all types. Extension of the temperature up to 80 °C.
High-power pumps	For all types, except VC 600.
Flow control	For all types.
Outdoor installation	For all types. An additional protection with a roof is necessary.
DI water	For VC 600 to VC 2000 W. Corrosion resistant construction for use with deionized water.
Noise reduction	For models VC 5000 up to 10000 W.

Options – not power supply dependent

Option	Cat. No.	VC 600	VC 1200	VC 1200 W	VC 2000	VC 2000 W	VC 3000	VC 3000 W	VC 5000	VC 5000 W	VC 7000	VC 7000 W	VC 10000	VC 10000 W
Flow control 1/2"	LWZ 118	●	●	●	●	●	–	–	–	–	–	–	–	–
Flow control 3/4"	LWZ 119	–	–	–	–	–	●	●	●	●	●	●	●	●
Outdoor installation	LWZ 120	●	●	●	●	●	●	●	–	–	–	–	–	–
Outdoor installation	LWZ 121	–	–	–	–	–	–	●	●	–	–	–	–	–
Outdoor installation	LWZ 122	–	–	–	–	–	–	–	–	●	●	–	–	–
Outdoor installation	LWZ 123	–	–	–	–	–	–	–	–	–	–	●	●	–
DI water	LWZ 124	●	–	–	–	–	–	–	–	–	–	–	–	–
DI water	LWZ 125	–	●	●	●	●	–	–	–	–	–	–	–	–
Noise reduction	LWZ 126	–	–	–	–	–	–	●	●	–	–	–	–	–
Noise reduction	LWZ 127	–	–	–	–	–	–	–	–	●	●	–	–	–
Noise reduction	LWZ 128	–	–	–	–	–	–	–	–	–	–	●	●	–

LAUDA Variocool

Options – power supply dependent

		115 V; 60 Hz	220 V; 60 Hz	208-220 V; 60 Hz						208-220 V; 3/PE; 60 Hz					
Option	Cat. No.	VC 600	VC 600	VC 1200*	VC 1200 W*	VC 2000*	VC 2000 W*	VC 3000	VC 3000 W	VC 5000	VC 5000 W	VC 7000	VC 7000 W	VC 10000	VC 10000 W
Heater 1.15 kW	LWZ 4095	●	–	–	–	–	–	–	–	–	–	–	–	–	–
Heater 1.35 kW	LWZ 2095	–	●	–	–	–	–	–	–	–	–	–	–	–	–
Heater 1.20-1.35 kW	LWZ 8095	–	–	●	●	●	●	●	●	–	–	–	–	–	–
Heater 3.65-4.1 kW	LWZ 3096	–	–	–	–	–	–	–	–	●	●	●	●	–	–
Heater 7.35-8.2 kW	LWZ 3097	–	–	–	–	–	–	–	–	–	–	–	–	●	●
Pump, 3.2 bar 37 L/min**	LWZ 8100	–	–	●	●	–	–	–	–	–	–	–	–	–	–
Pump, 3.2 bar 37 L/min**	LWZ 8101	–	–	–	–	●	●	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 2103	–	–	●	●	–	–	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 2104	–	–	–	–	●	●	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 2102	–	–	–	–	–	–	●	●	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 3105	–	–	–	–	–	–	–	–	●	●	●	●	●	●
Pump, 5.0 bar 60 L/min**	LWZ 3106	–	–	–	–	–	–	–	–	●	●	●	●	●	●

		230 V; 50 Hz							400 V; 3/N/PE; 50 Hz					
Option	Cat. No.	VC 600	VC 1200*	VC 1200 W*	VC 2000*	VC 2000 W*	VC 3000	VC 3000 W	VC 5000	VC 5000 W	VC 7000	VC 7000 W	VC 10000	VC 10000 W
Heater 1.5 kW	LWZ 1095	●	●	●	●	●	●	●	–	–	–	–	–	–
Heater 4.5 kW	LWZ 2096	–	–	–	–	–	–	–	●	●	●	●	–	–
Heater 9.0 kW	LWZ 2097	–	–	–	–	–	–	–	–	–	–	–	●	●
Pump, 3.2 bar 37 L/min**	LWZ 1100	–	●	●	–	–	–	–	–	–	–	–	–	–
Pump, 3.2 bar 37 L/min**	LWZ 1101	–	–	–	●	●	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 1103	–	●	●	–	–	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 1104	–	–	–	●	●	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 1102	–	–	–	–	–	●	●	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 2105	–	–	–	–	–	–	–	●	●	●	●	●	●
Pump, 5.0 bar 60 L/min**	LWZ 2106	–	–	–	–	–	–	–	●	●	●	●	●	●

		100 V; 50/60 Hz	200 V; 50/60 Hz						200 V; 3/PE; 50/60 Hz					
Option	Cat. No.	VC 600	VC 1200*	VC 1200 W*	VC 2000*	VC 2000 W*	VC 3000	VC 3000 W	VC 5000	VC 5000 W	VC 7000	VC 7000 W	VC 10000	VC 10000 W
Heater 1.0 kW	LWZ 6095	●	–	–	–	–	–	–	–	–	–	–	–	–
Heater 1.1 kW	LWZ 5095	–	●	●	●	●	●	●	–	–	–	–	–	–
Heater 3.4 kW	LWZ 4096	–	–	–	–	–	–	–	●	●	●	●	–	–
Heater 6.8 kW	LWZ 4097	–	–	–	–	–	–	–	–	–	–	–	●	●
Pump, 3.2 bar 37 L/min**	LWZ 5100	–	●	●	–	–	–	–	–	–	–	–	–	–
Pump, 3.2 bar 37 L/min**	LWZ 5101	–	–	–	●	●	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 5103	–	●	●	–	–	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 5104	–	–	–	●	●	–	–	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 5102	–	–	–	–	–	●	●	–	–	–	–	–	–
Pump, 4.8 bar 37 L/min**	LWZ 4105	–	–	–	–	–	–	–	●	●	●	●	●	●
Pump, 5.0 bar 60 L/min**	LWZ 4106	–	–	–	–	–	–	–	●	●	●	●	●	●

* Use with high-power pumps causes a change of the height of the housing from 650 mm to 790 mm.

** Using such a pump can change the available cooling capacity

Variocool accessories (excerpt)

Cooling water tubing, EPDM

Temperature range from -40...100 °C and pressure range max. 20 bar

Cat. No.	Description	d _i (mm)	d _e (mm)
RKJ 031	EPDM tubing, fiber-reinforced	13	19
RKJ 032	EPDM tubing, fiber-reinforced	19	27
RKJ 033	EPDM tubing, fiber-reinforced	25	34



RKJ 031

Polymer tubing

EPDM tubing

Cat. No.	d _i (mm)	Temperature range °C
RKJ 111	9	10...90
RKJ 112	12	10...90

Tube clips, stainless steel

To secure tubings

Cat. No.	Description
EZS 032	Tube clip 16-27 mm, 1/2" external Ø

d_i = internal diameter ; d_e = external diameter




EZS 032

Heat transfer liquids


Designation	Temperature range	5 L	Cat. No. 10 L	20 L
Aqua 90	5...90 °C	LZB 120	LZB 220	LZB 320
Kryo 30	-30...90 °C	LZB 109	LZB 209	LZB 309

Interface modules

Cat. No.	Description
LRZ 912	Analog module, 2 x In, 2 x Out, 0(4)...20 mA or 0...10 V
LRZ 913	RS 232/485 interface, electrically isolated, 9-pin SUB-D
LRZ 914	Contact module NAMUR, 1 x In, 1 x Out, NE 28, 2 DIN sockets
LRZ 915	Contact module SUB-D, 3 x In, 3 x Out, 15-pin SUB-D
LRZ 917	Profibus interface, electrically isolated, 9-pin SUB-D
LRZ 918	Pt100/LiBus module

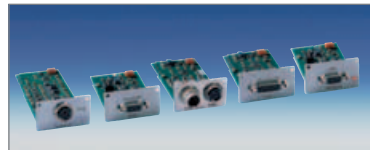

LRZ 912 LRZ 913 LRZ 914 LRZ 915 LRZ 917

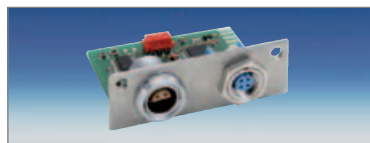

LRZ 918



Order the detailed LAUDA accessories brochure and the heat transfer liquids brochure free of charge. These and additional product information can also be found at www.lauda-brinkmann.com